


EM[®] 2040P



KONGSBERG

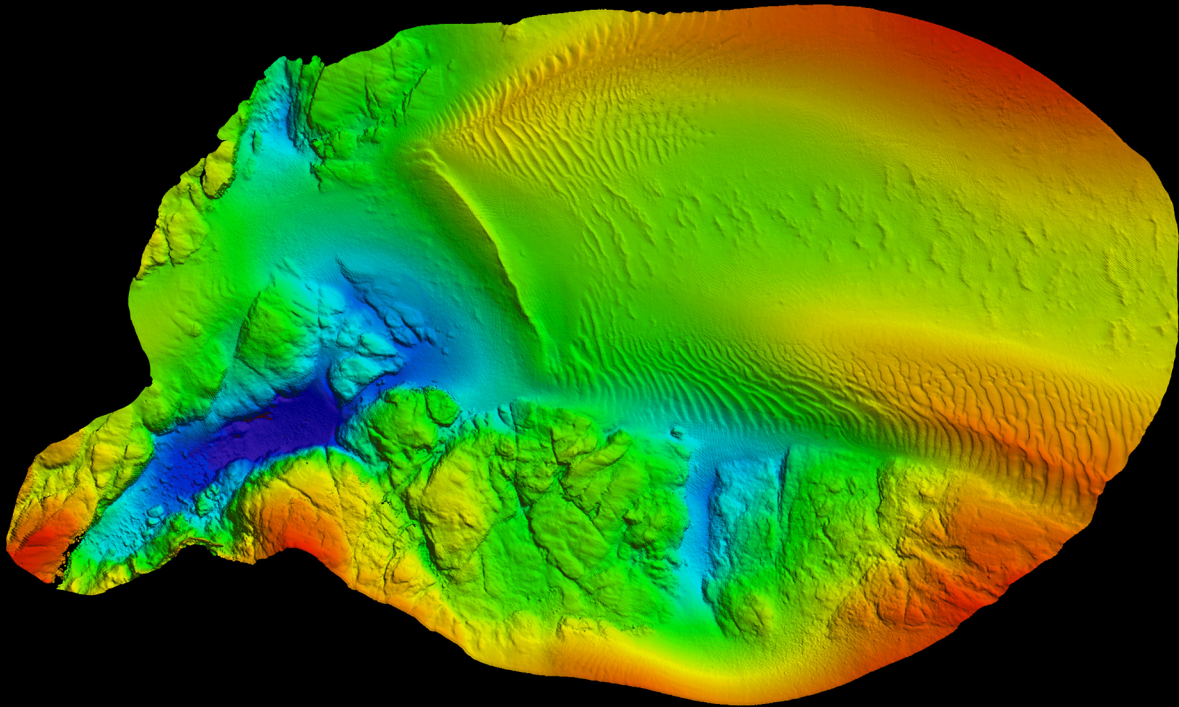

MULTIBEAM ECHO SOUNDER

The EM 2040P is a shallow water multibeam echo sounder based on the EM 2040 technology, an ideal tool for any high resolution mapping and inspection application.

The receiver and transmitter are integrated in a common sonar head. The system fulfils, and even surpasses, the IHO-S44 special order and the more stringent LINZ specification.

Key facts

The operating frequency range is from 200 to 400 kHz. The operator can thus on the fly choose the best operating frequency for the application: 300 kHz for near bottom, 200 kHz for deeper waters, and 400 kHz for very high resolution inspection. Due to the very large operating bandwidth available the system will have an output sample rate of more than 60 kHz. The system will thus effectively operate with very short pulse lengths, shortest pulse is 14 microseconds, which gives a raw range resolution ($c\tau/2$) of 10.5 mm.

By utilizing both CW and FM chirp pulses, the system can achieve a much longer range capability with a high resolution. The maximum depth range is 550 m at 200 kHz with a swath with up to 760 m. The angular coverage for the 200 and 300 kHz is 140 degrees, allowing coverage of 5.5 times water depth. For the 400 kHz mode the angular coverage is 120 degrees.

As an option the EM 2040P can be delivered with the dual swath capability, allowing a sufficient sounding density along track at a high vessel speed.

The EM 2040P has a depth rating of 30 m.

Components

The basic EM 2040P has three units: A sonar head, a processing unit and a workstation.

The sonar head has bumpers in the corners of the face to protect the transducer if it is placed on deck, and it has carrying handles in the sides.

The EM 2040P can be delivered with a splash proof processing unit.

For completeness, data input from a motion sensor and a positioning system is required, as is the sound speed profile of the water column between the transducers and the bottom. Sound speed at the transducer depth is an optional input.

Optionally, the sonar head may be delivered with mounts for motion sensor and sound speed sensor, factory aligned for ease of mounting.

All electronics are contained in the sonar head which is interfaced to the processing unit via GBit Ethernet. The processing unit also supplies 48 V power via the same cable. Operator control, data quality inspection and data storage is handled by the hydrographic workstation running SIS software or by 3rd party software.

FEATURES

- High resolution
- Wide frequency range
- Short pulse lengths, large bandwidth
- FM chirp
- Complete roll, pitch and yaw stabilization
- Nearfield focusing both on transmit and receive
- Water column
- Seabed image
- Depth rated to 30 m
- Easy to install

- Options:
- Water column logging
 - Extra detections
 - Dual swath



TECHNICAL SPECIFICATIONS

Frequency range:	200 to 400 kHz
Beam width:	1 * 1 degree at 400 kHz
Max ping rate:	50 Hz
Swath coverage sector:	Up to 140 degrees
Sounding patterns:	Equiangular, equidistant and high density
No. of soundings per ping:	400 (single head, single swath) 800 (single head, dual swath)
Roll stabilized beams:	+/-15 degrees
Pitch stabilized beams:	+/-10 degrees
Pulse length:	14 µs to 12 ms

Coverage example for EM 2040P in cold ocean water with bottom type rock (BS = - 10 dB), FM mode

Operating mode	Max depth	Max coverage across
200 kHz	550 m	760 m
300 kHz	435 m	620 m
400 kHz	270 m	340 m

Physical dimensions (excluding connectors and mounting arrangements)

Component	Dimensions (mm)	Weight (kg)	Other
Sonar head	560 x 300 x 166 (LxWxH)	19.5 kg (1.7 kg in water)	Depth rating 30 m
Processing unit (2U 19" rack) *	482.5 x 88.6 x 424 (W x H x D)	10.5 kg	NA
Processing unit - Splash proof	370 x 100 x 263 (W x H x D)	11 kg	IP56

Laptop, HWS and monitor can be delivered on request.

Specifications subject to change without any further notice.
EM® is a registered trademark of Kongsberg Maritime AS in Norway and other countries.

386382 / B March 2016

KONGSBERG MARITIME
Switchboard: +47 815 73 700
Global support 24/7: +47 33 03 24 07
E-mail sales: km.sales@km.kongsberg.com
E-mail support: km.support@kongsberg.com

km.kongsberg.com



KONGSBERG